


## CATEGORY: Hot Stabs

## TMT Hot Stab Check Valve

Engineered Tooling Solutions *FAST*

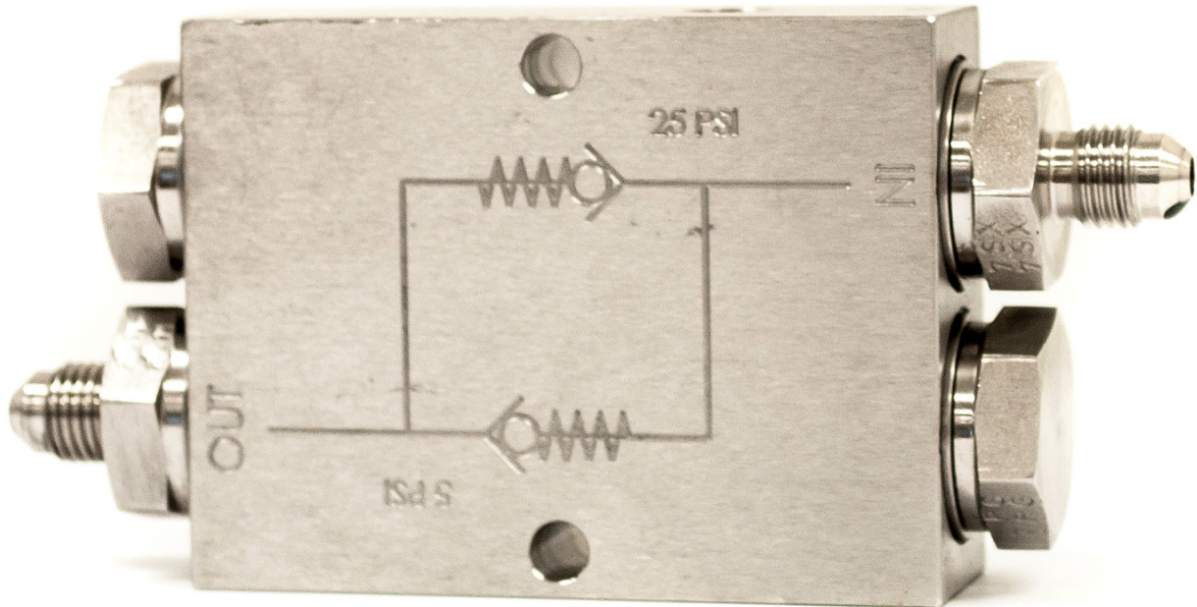

The TMT Hot Stab Check Valve is a custom designed hot stab check valve for use with existing hot stabs.

The Hotstab Check Valve was designed to stop possible leaking from a hot stab by installing a 25psi check valve. The Hot Stab Check valve also has a 5psi check valve in the opposite orientation to ensure that no seawater contaminates the hydraulic lines.

The TMT Hot Stab Check Valve can be grouped into a check valve manifold or customised to suit most client applications.

### Features:

- Easy to install and remove
- 2205 Stainless Steel
- Engraved hydraulic circuit
- Dual check valves
- Field proven

### Specifications:

• Dimensions	123L x60W x25Hmm
• Weight in Air	0.93kg
• Weight in Seawater	0.81kg
• In Check Valve	25psi
• Out Check Valve	5psi
• Safe Working Pressure	5000psi
• Hydraulic Fitting	$\frac{7}{16}$ JIC
• Depth Rating	Unlimited

Specifications subject to change without notice. All rights reserved.