
Flow Line Plug

6”

Category: Protection & Preservation Equipment

The 6-inch Flow Line Plug allows the positive sealing of an open flow line.

It features an ROV handle for placement and handling, and another that is rotated to activate the seals which expand against the inner diameter of the flowline.

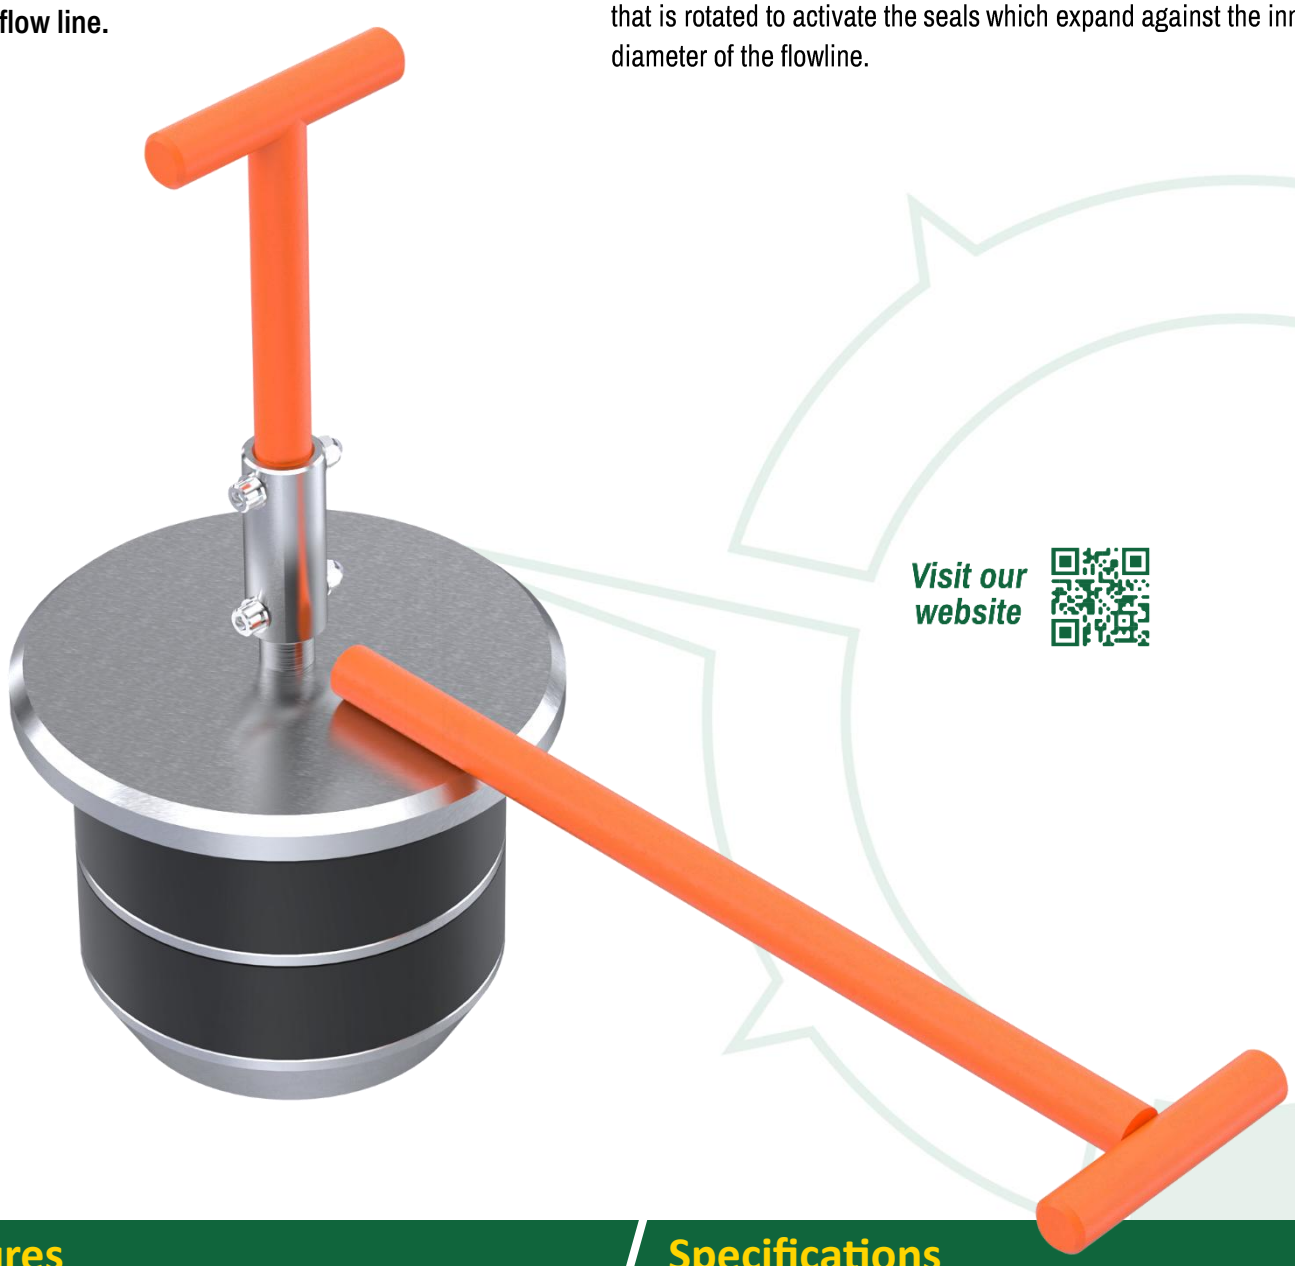

Visit our website

Features

- Compressible seal provides positive holding grip
- Simple installation & removal

Specifications

Dimensions (mm)	490 (H) x Ø190 (Cap OD) x 485 (W)
Plug Diameter	150 mm (6”)
Plug Depth	140 mm
Weight in Air	16 kg
Weight in Seawater	12 kg
Max. Handle Torque	200 Nm
Depth Rating	Unlimited

1 Ambitious Link, Bibra Lake WA 6163
T +61 8 9411 6500 | E sales@tmtrov.com

TMT-NSS-400 Rev 2 PN: 0002-0704 Copyright © 2026.
All rights reserved. Specifications subject to change without notice.