Flowline Hub Cleaner

4”


Category: Cleaning & Grinding Equipment

The 4” Flowline Hub Cleaner removes foreign matter from the gasket surface of a 4” bore hub.

The Hub Cleaner mates onto the 4” bore of the connector by means of a plastic hub and external guide cap.

Driven by a hydraulic motor, the cleaning head rotates scouring pads for cleaning flat and conical surfaces of the flowline hub.

The Hub Cleaner design prevents metal-to-metal contact with the bore surface.

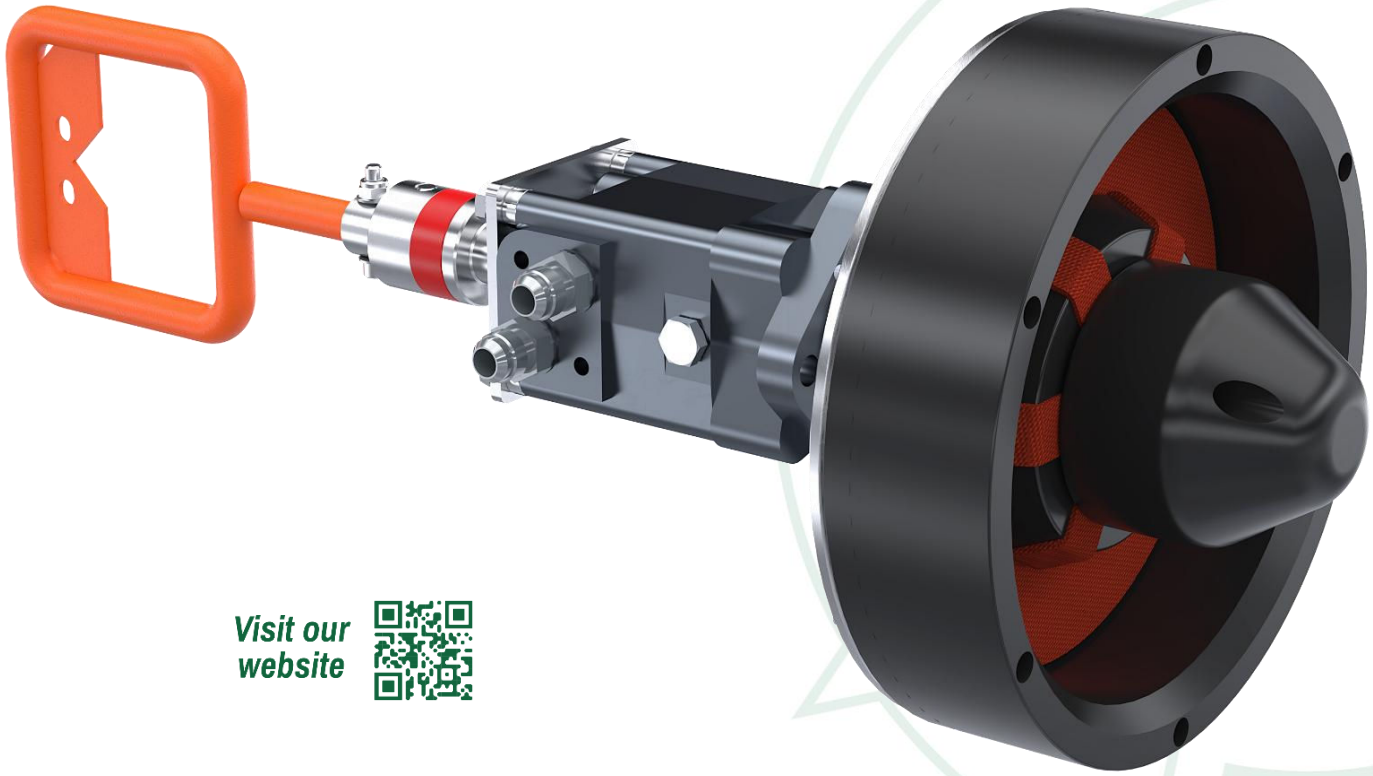

Visit our website

Features

- Simple installation & removal
- Low maintenance
- ROV flexi-joint handle
- ROV deployed & operated

Specifications

Dimensions (mm)	Ø300 (OD) x 735 (L)
Weight in Air	25 kg
Weight in Seawater	18 kg
Max. Flow Rate (cont.)	65 Lpm
Max. Motor Supply Pressure	140 bar (2,000 psi)
Depth Rating	Unlimited

1 Ambitious Link, Bibra Lake WA 6163
T +61 8 9411 6500 | E sales@tmtrov.com

TMT-NSS-614 Rev 2 PN: 0000-6461 Copyright © 2026.
All rights reserved. Specifications subject to change without notice.