
ROV Valve Handle Assembly

Category: Hydraulic Power Equipment

The ROV Valve Handle Assembly combines a paddle and ball-valve package for safe ROV operation.

The ball-valve stem is protected against overload by integrated travel stops that ensure precise 90° valve actuation.

Available in standard and compact sizes, the assembly can be configured with a range of compatible ball valves.

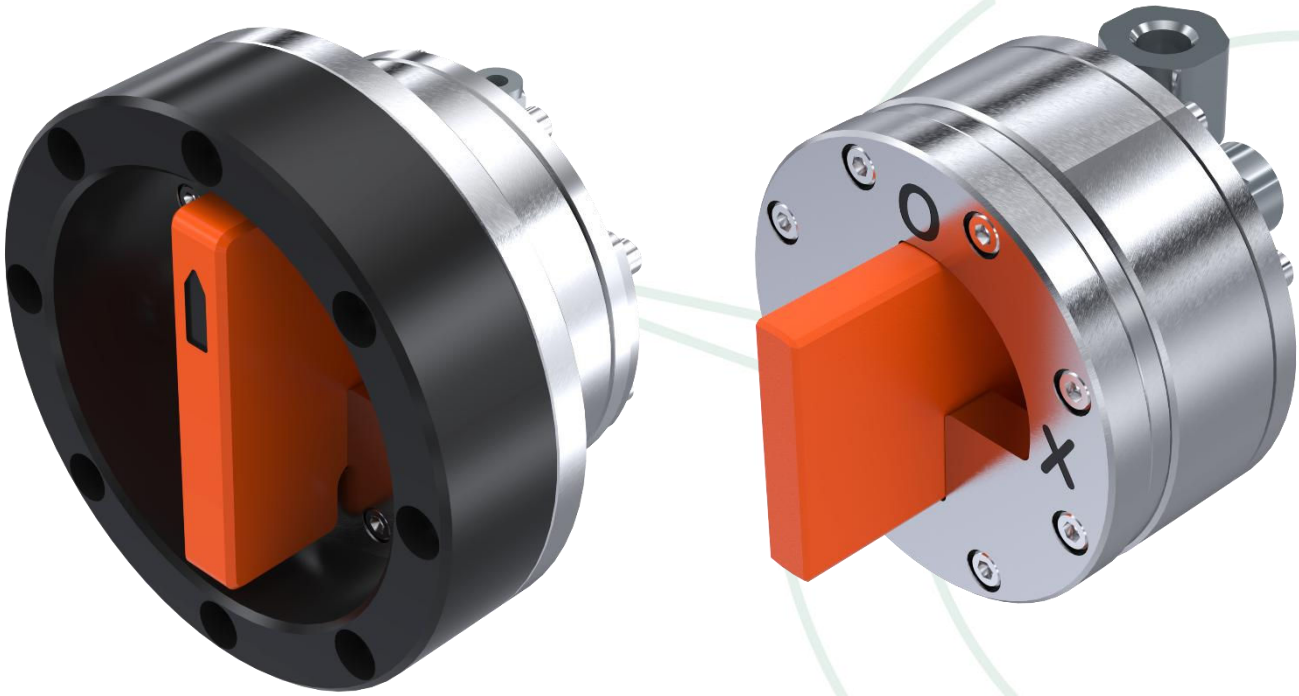

Visit our website

Features

- Compatible with 1/4", 3/8" and 1/2" bore valves
- Protection against stem overloading
- Easily mounted onto an ROV tool or panel
- Compact
- ROV Operable

Specifications

Pressure Rating (valves)	690 bar (10,000 psi)
Depth Rating	Unlimited
Standard (0005-4499)	
Dimensions (mm)	Ø170 x 140 (L)
Weight in Air	6.5 kg
Weight in Seawater	5.5 kg
Compact (0005-6357)	
Dimensions (mm)	Ø105 x 135 (L)
Weight in Air	3.5 kg
Weight in Seawater	3.0 kg

1 Ambitious Link, Bibra Lake WA 6163
T +61 8 9411 6500 | E sales@tmtrov.com
TMT-NSS-124 Rev 4 PN: S: 0005-4499 C: 0005-6357
Copyright © 2026.
All rights reserved. Specifications subject to change without notice.