2-Way Hydraulic Ball Valve


½”

Category: Hydraulic power Equipment

The ½” Hydraulic Ball Valve is actuated by a hydraulic cylinder. The cylinder is available in double-acting and single acting with spring return configurations.

The cylinder stroke prevents overloading of the ball valve stem, enabling reliable and safe 90° actuation.

The compact, lightweight cylinder is mounted in-line with hydraulic tubing.

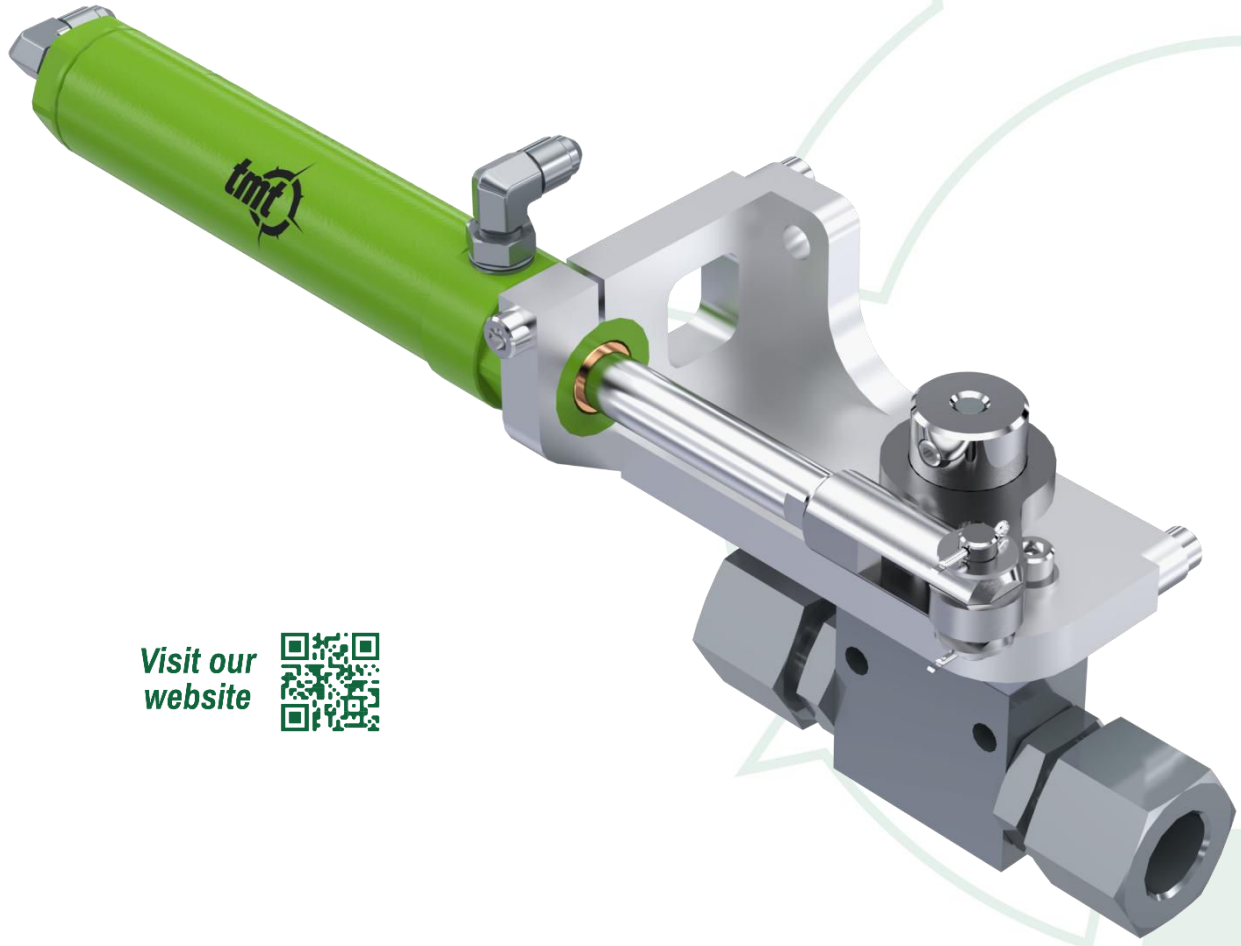

Visit our website

Features

- Precise, 90° operation
- Various mounting options available
- ROV Operable
- Compact

Specifications

Dimensions (mm)	350 (L) x 130 (W) x 95 (H)
Weight in Air	3.5 kg
Weight in Seawater	3.0 kg
Cylinder Operational Pressure	207 bar (3,000 psi)
Valve Pressure Rating	690 bar (10,000 psi)
Depth Rating	Unlimited

1 Ambitious Link, Bibra Lake WA 6163
T +61 8 9411 6500 | E sales@tmtrov.com

TMT-NSS-127 Rev 4 PN: 0013-0564 Copyright © 2026. All rights reserved. Specifications subject to change without notice.