10K Actuated Ball Valve


¾”

Category: Control Equipment

The ¾” 10k quarter-turn ball valve is actuated by a double-acting hydraulic cylinder.

The mechanism prevents valve-stem overload. Available configurations include manual override, failsafe spring return to close, and manual-only.

The valve is rated for service with wellbore fluids used in well intervention and chemical injection applications, subject to fluid compatibility.

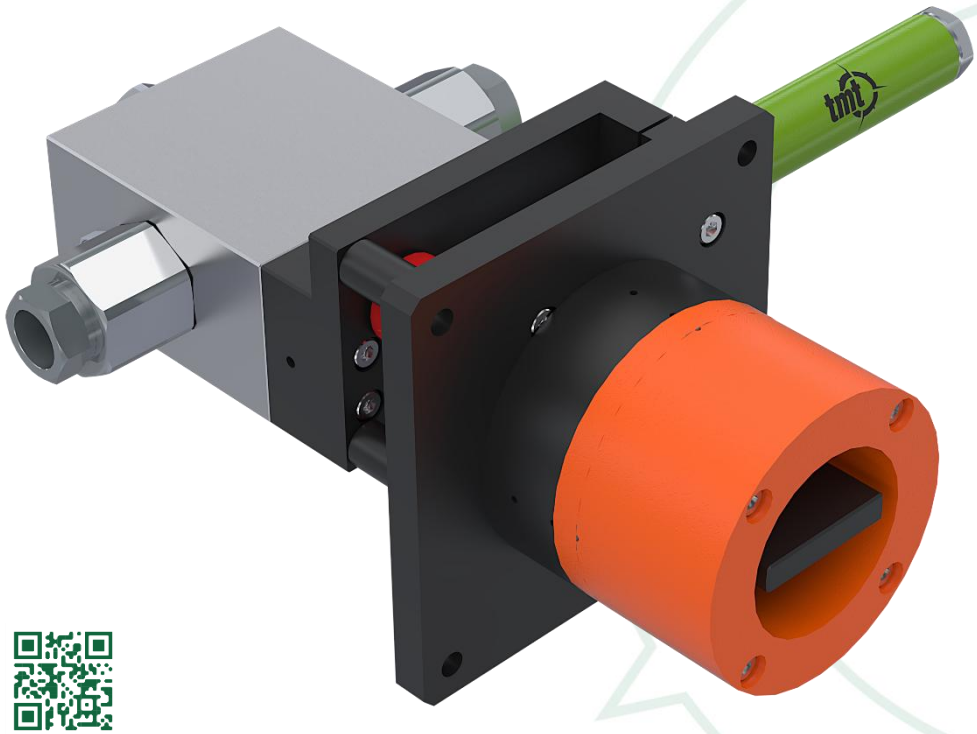

Visit our website

Features

- API 6A, PSL3G, H2S rated
- 1” medium pressure valve ports
- Various mounting options available
- ROV override of actuator

Specifications

Dimensions (mm)	395 (L) x 391 (W) x 160 (H)
Weight in Air	29 kg
Weight in Seawater	25 kg
Cylinder Operating Pressure	207 bar (3,000 psi)
Nominal Operating Torque	80 Nm
Maximum Torque Input	170 Nm
Pressure Rating	690 bar (10,000 psi)
Depth Rating	3,000 m

tmt solves tmtrov.com

1 Ambitious Link, Bibra Lake WA 6163
T +61 8 9411 6500 | E sales@tmtrov.com

TMT-NSS-588 Rev 1 PN: 0017-5838 Copyright © 2026.
All rights reserved. Specifications subject to change without notice.