
Dirty Oil Pack
45 Lpm

Category: Hydraulic Power Equipment


The Dirty Oil Pack (DOP) provides an isolated hydraulic supply for ROV tooling, protecting the ROV hydraulic system from contamination.

ROV hydraulics drive the clean-side motor, while the dirty-side pump supplies tooling from a dedicated bladder.

A pilot-operated check valve is engaged to activate the DOP.

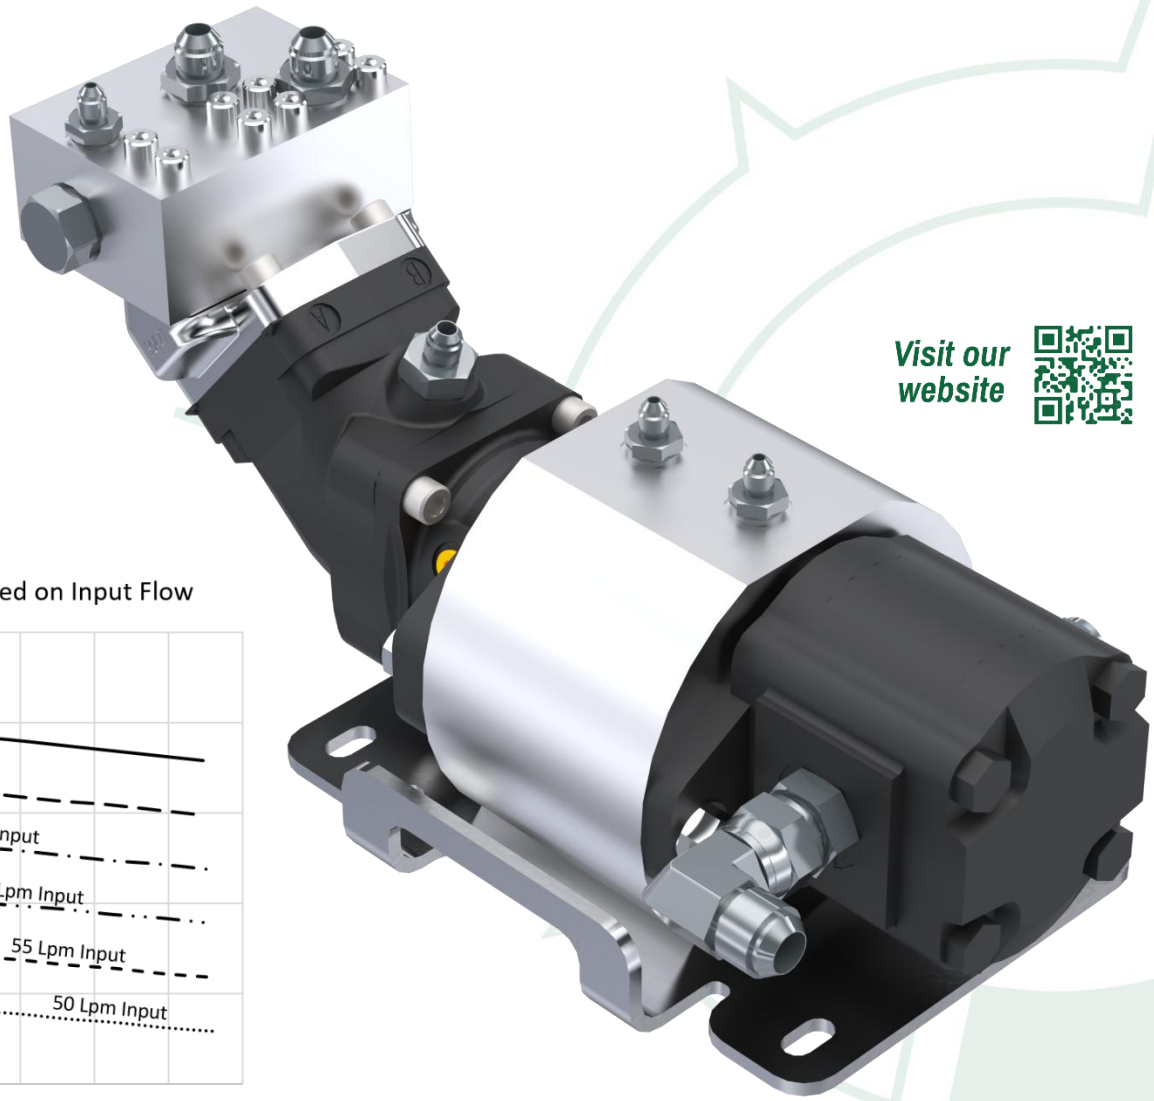

Visit our website

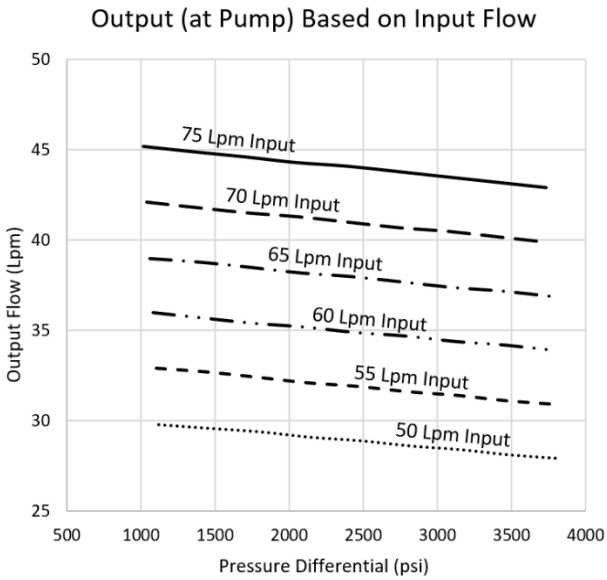

Features

- Pilot operated ON/OFF
- Quick fit to ROV
- Compact design
- Self-contained

Specifications

Dimensions (mm)	485 (L) x 245 (W) x 230 (H)
Weight in Air	~17 kg
Weight in Seawater	~12 kg
Max. Output Pressure (Intermittent)	280 bar (4,000 psi)
Max. Output Flow	45 Lpm
Depth Rating	Unlimited

1 Ambitious Link, Bibra Lake WA 6163
T +61 8 9411 6500 | E sales@tmtrov.com

TMT-NSS-709 Rev 1 PN: 0019-3294 Copyright © 2026.
All rights reserved. Specifications subject to change without notice.